


6RN112M02E32 2-pole 4,00kW D/Y 400/690V 50Hz S1 IC411 IE3

rotor B.V.


Driving efficiency and sustainability



Torque versus Speed curve with variable frequency drive

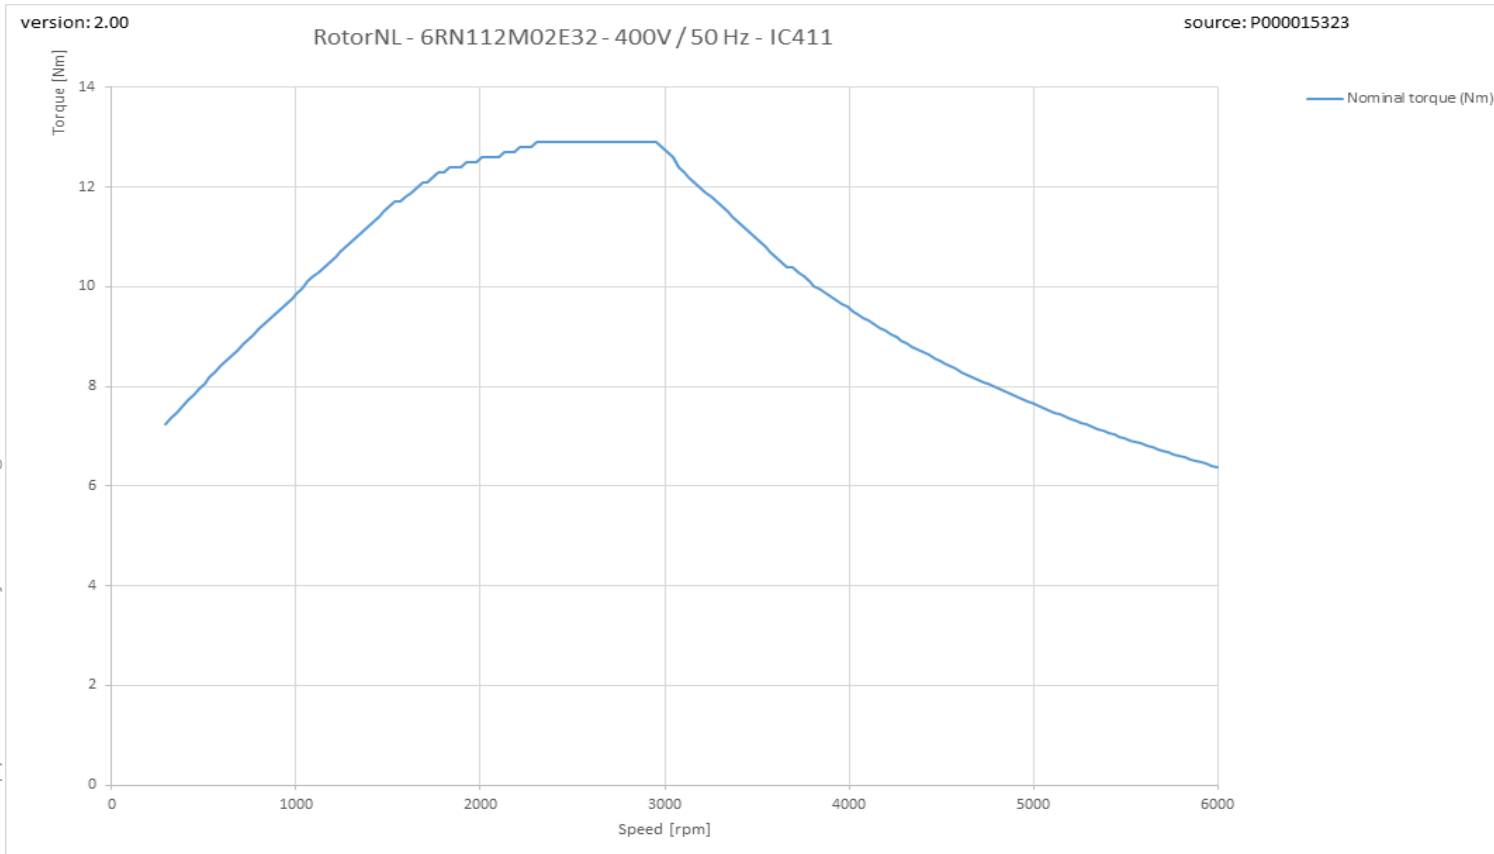

Therm_VSD graph

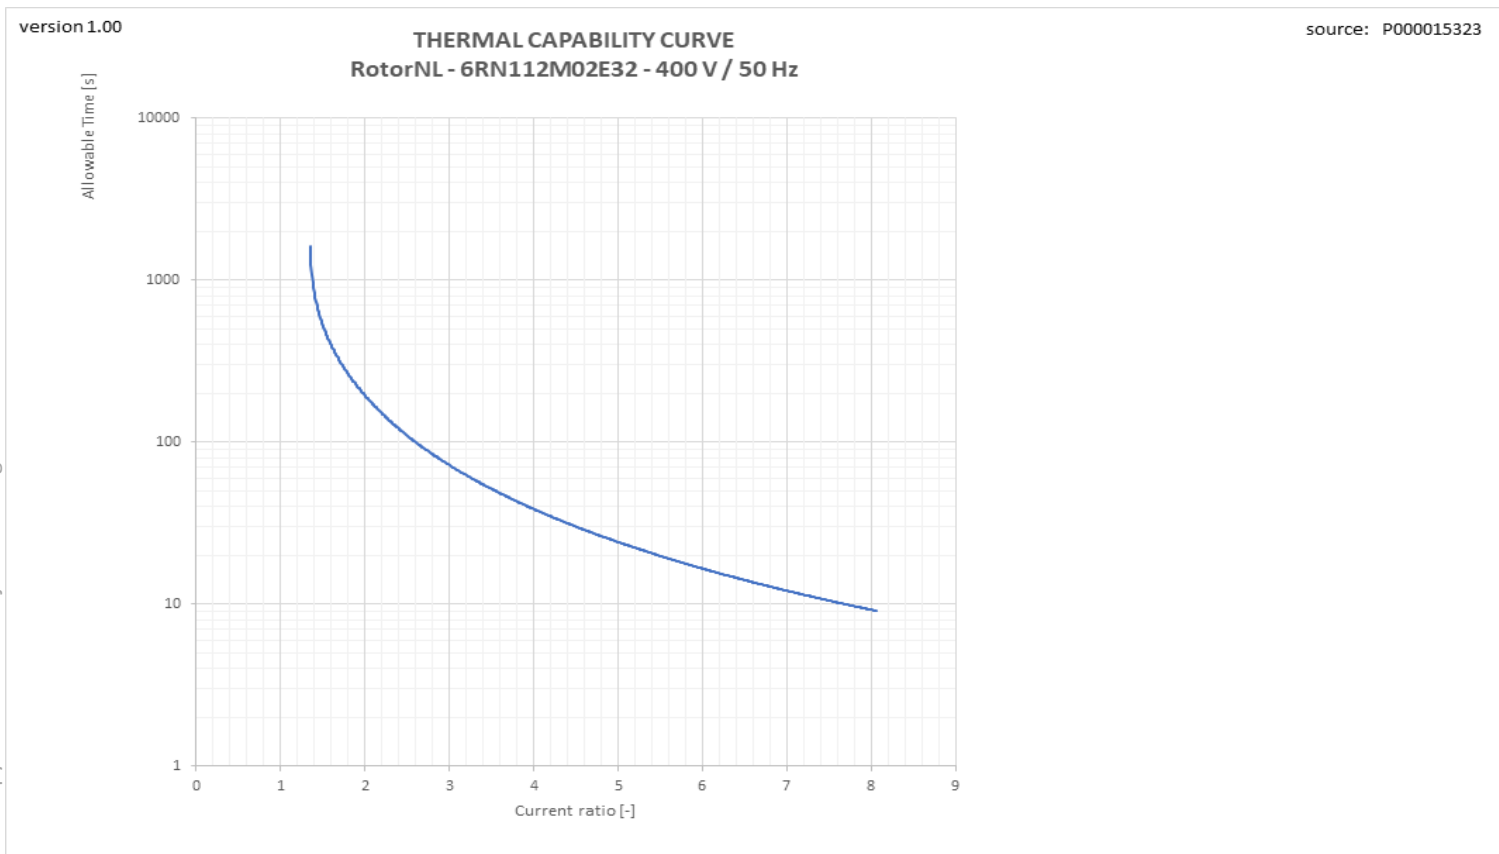

This is an uncontrolled copy - document subject to change - alterations reserved without notice

Tn graph

