


6RN180L04E44 4-pole 22,00kW D/Y 400/690V 50Hz S1 IC411 IE4

rotor B.V.


Driving efficiency and sustainability



Torque versus Speed curve with variable frequency drive

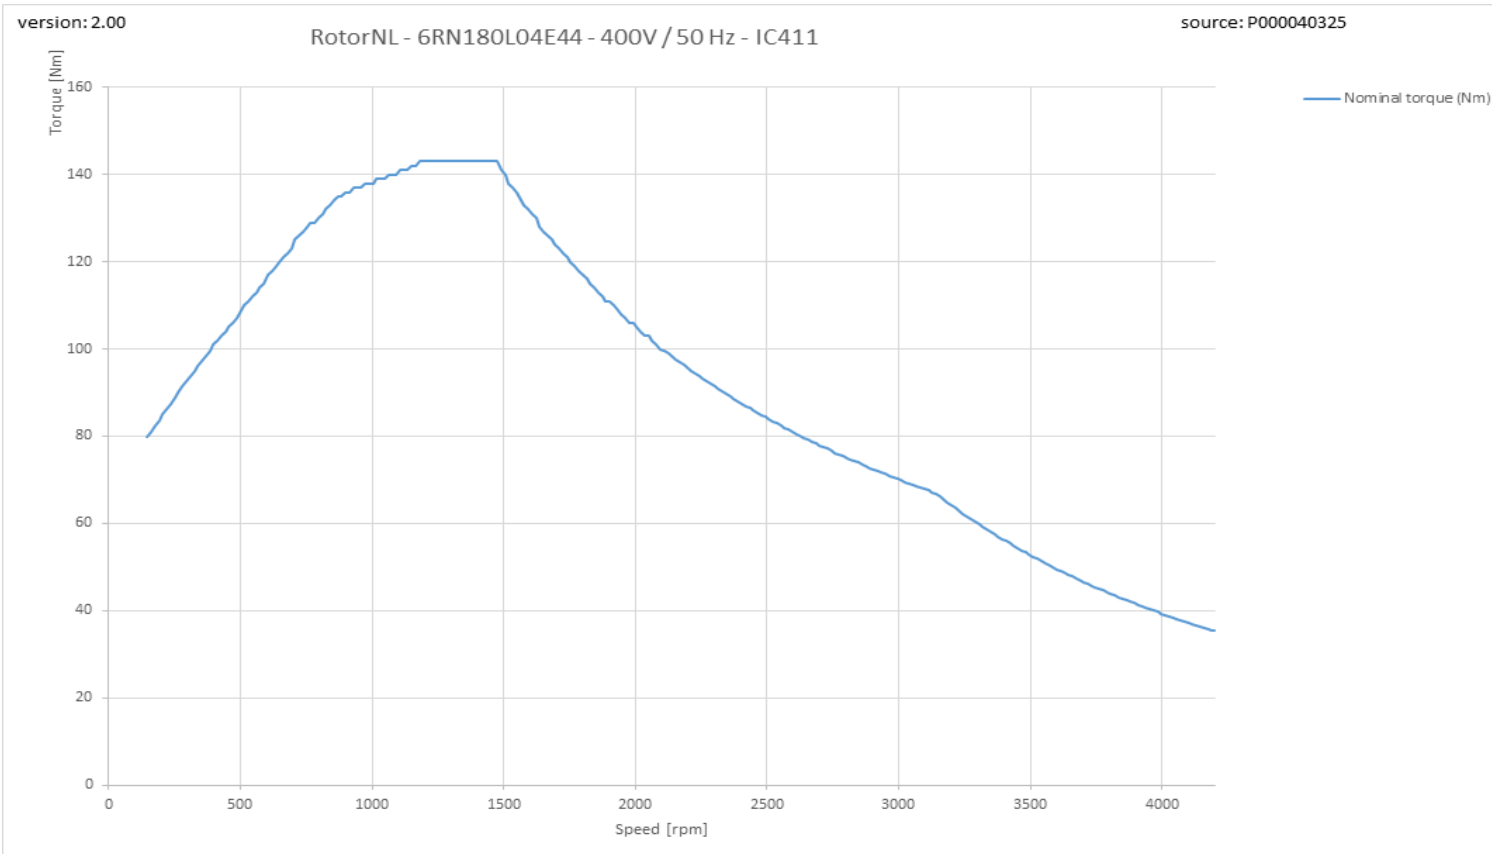

Therm_VSD graph

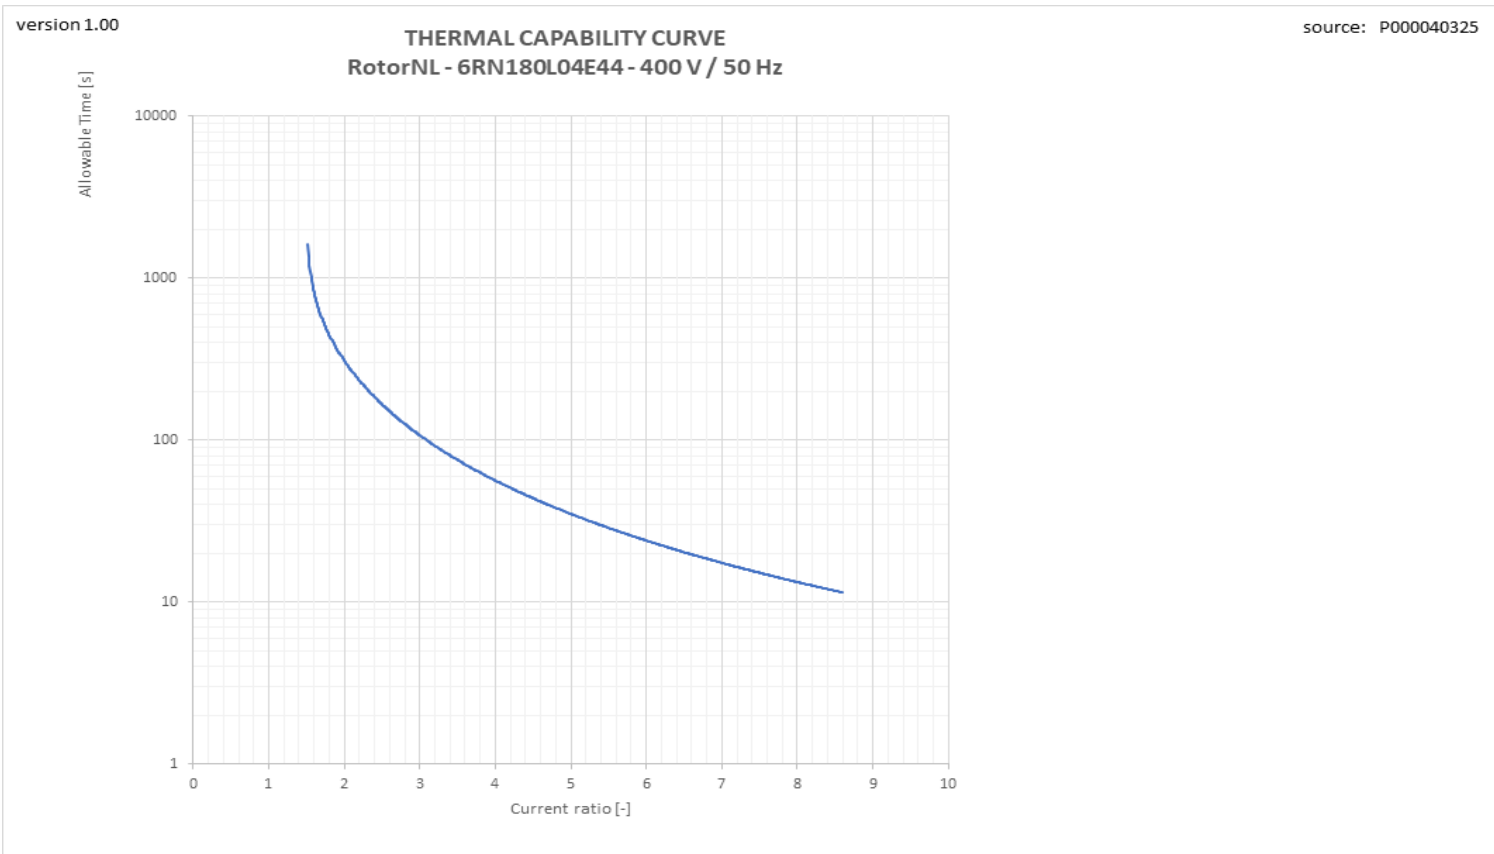

Tn graph

