

Model No. 2-Pole cage motor 23RN 180L 37kW D400V 50Hz IM1001

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	37	49,6	65,6	2935	120,4	N/A	91,1	0,89	6,89	2,15	2,97
690	Y				37,8								

Motor type	23RN180L02
Enclosure	IP23 Free circulation
Frame Material	Cast iron
Frame size	180L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	37 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. H
Temperature rise winding	78 K
Temperature rise surface	28 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6312/C3
Lubrication method	20gr/5600hrs
Type of grease	0

Phase resistance at 20°C	0,1421 Ohm
Country of origin	CN

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	215%	689%	157%	297%	18,3 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP23
Mounting type	IM1001
Cooling method	IC01
Motor weight - approx.	222 kg
Gross weight - approx.	229 kg
Motor inertia	0,1350 kgm²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	77 dB(A)

Direction of rotation	cw /ccw
-----------------------	----------------


	PTC 150°C
--	------------------

	No
--	-----------

	No
--	-----------

	No
--	-----------

Schematic presentation of torque-speed curve

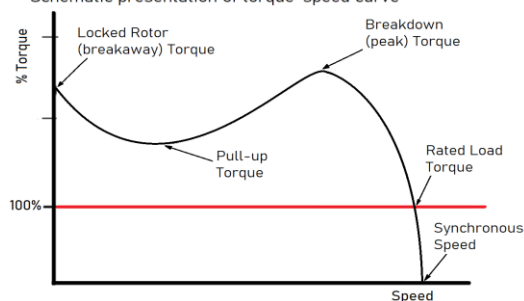

P000012718



Driving efficiency and sustainability

