

Model No. 4-Pole cage motor 23RN 280M 132kW D400V 50Hz IM2021-FF600

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	132	175	227	1470	857,6	N/A	93,2	0,90	6,90	2,13	2,68
690	Y				131								
460	D	60	152	203,8	226	1760	824,8	< IE1	93,5	0,90	6,90	2,13	2,68

Motor type	23RN280M04
Enclosure	IP23 Free circulation
Frame Material	Cast iron
Frame size	280M
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	132 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise winding	64 K
Temperature rise surface	37 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Rotor type	Cage motor
Bearing type	6318/C3
Lubrication method	40gr/8000hrs
Type of grease	0

Phase resistance at 20°C	0,0310 Ohm
Country of origin	CN

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	213%	687%	171%	268%	64,8 A
@ D 460V 60Hz	213%	690%	171%	268%	61,8 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1


Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP23
Mounting type	IM2021-FF600
Cooling method	IC01
Motor weight - approx.	740 kg
Gross weight - approx.	760 kg
Motor inertia	3,2120 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	74 dB(A)
Direction of rotation	cw /ccw
	PTC 150°C
	No
	No
	No

Schematic presentation of torque-speed curve

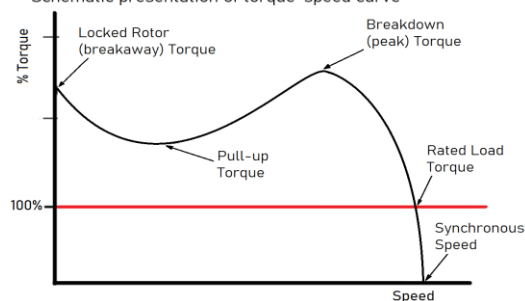

P000012749
P000064772



Driving efficiency and sustainability

