

Model No. 2-Pole cage motor 23RN 315L 250kW D400V 50Hz IM1001

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	250	335	421	2970	803,9	N/A	95,1	0,90	6,13	1,49	2,86
690	Y				243								

Motor type	23RN315LA02
Enclosure	IP23 Free circulation
Frame Material	Cast iron
Frame size	315L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	250 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. F
Temperature rise winding	70 K
Temperature rise surface	30 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6317/C3
Lubrication method	30gr/2500hrs
Type of grease	0

Phase resistance at 20°C	0,0113 Ohm
Country of origin	CN

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	149%	612%	120%	286%	92 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP23
Mounting type	IM1001
Cooling method	IC01
Motor weight - approx.	1030 kg
Gross weight - approx.	1060 kg
Motor inertia	1,9350 kgm ²


Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	84 dB(A)

Direction of rotation	cw /ccw
-----------------------	---------

	PTC 150°C
--	-----------

	No
	No
	No

Schematic presentation of torque-speed curve

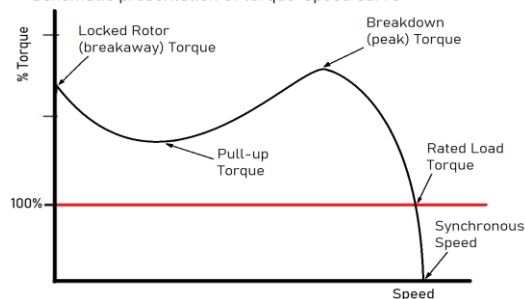

P000012756



Driving efficiency and sustainability

