

Model No. 4-Pole cage motor 23RN 315L 250kW D400V 50Hz IM3011-FF740

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	250	335	430	1480	1613,2	N/A	95,4 95,7 95,4	0,88 0,86 0,79	6,05	1,64	2,14
690	Y				248								
460	D	60	300	402,1	448	1780	1609,6	IE2	95,4	0,88	6,05	1,64	2,14

Motor type	23RN315LA04
Enclosure	IP23 Free circulation
Frame Material	Cast iron
Frame size	315L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	250 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise winding	64 K
Temperature rise surface	36 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Rotor type	Cage motor
Bearing type	6319/C3
Lubrication method	45gr/4000hrs
Type of grease	0

Phase resistance at 20°C	0,0176 Ohm
Country of origin	CN

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	164%	604%	123%	214%	117 A
@ D 460V 60Hz	164%	604%	123%	214%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1


Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP23
Mounting type	IM3011-FF740
Cooling method	IC01
Motor weight - approx.	1160 kg
Gross weight - approx.	1190 kg
Motor inertia	4,4810 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	82 dB(A)
Direction of rotation	cw /ccw
	PTC 150°C
	No
	No
	No

Schematic presentation of torque-speed curve

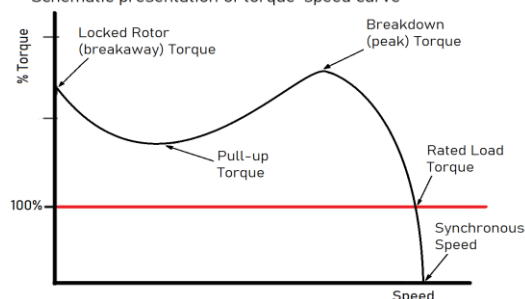

P000012760
P000065830



Driving efficiency and sustainability

