

Model No. 4-Pole cage motor 23RN 355L 710kW D400V 50Hz IM3011-FF940

U (V)	Δ/Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	710	951,7	1230	1485	4566,0	N/A	95,5	0,87	5,26	1,58	2,42
690	Y				711								

Motor type	23RN355Lx04
Enclosure	IP23 Free circulation
Frame Material	Cast iron
Frame size	355L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	710 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. H
Temperature rise winding	80 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6322/C3
Lubrication method	60gr/4000hrs
Type of grease	0

Country of origin	CN
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	158%	526%	115%	242%	330 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP23
Mounting type	IM3011-FF940
Cooling method	IC01
Motor weight - approx.	2130 kg
Gross weight - approx.	2190 kg
Motor inertia	15,3900 kgm ²
Vibration level	according IEC60034-14

Direction of rotation	cw /ccw
	PTC 150°C
	No
	No
	No

Schematic presentation of torque-speed curve

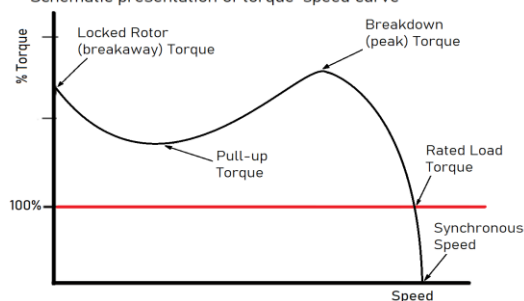

P000015354



Driving efficiency and sustainability

