

Model No. 6-Pole cage motor 23RN 355S 315kW D400V 50Hz IM3011-FF740

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	315	425	587	990	3038,6	< IE1	94,5	0,82	5,00	1,50	1,90
	Y				339								
460	D	60	378	506,7	612	1190	3033,5	< IE1			0,05	1,50	1,90

Motor type	23RN355S06
Enclosure	IP23 Free circulation
Frame Material	Cast iron
Frame size	355S
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	315 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-

Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6322/C3
Lubrication method	60gr/4000hrs
Type of grease	0

Country of origin	CN
-------------------	-----------

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	150%	499%		190%	
@ D 460V 60Hz	150%	5%		190%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP23
Mounting type	IM3011-FF740
Cooling method	IC01
Motor weight - approx.	1850 kg
Gross weight - approx.	1910 kg
Motor inertia	7,9100 kgm²
Vibration level	according IEC60034-14

Direction of rotation	cw /ccw
	PTC 150°C
	No
	No
	No

Schematic presentation of torque-speed curve

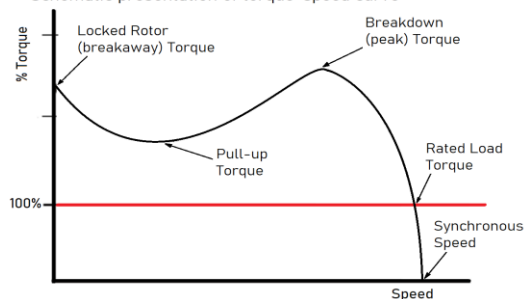

P000015591
P000015592



Driving efficiency and sustainability

