

Datasheet

rotor nl

rotor
WEG Group

Mors 1-5, 7151 MX Eibergen NL
www.rotor.nl tel.: +31 545 464640
sales@rotor.nl tel.: +31 545 464646

Model No. 2-Pole cage motor 5RN 132S 7,5kW D400V 50Hz IM2181-FT165

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	7,5	10	13,8	2930	24,4	IE1	88,0 86,8 85,0	0,89 0,88 0,82	7,94	2,00	3,21
690	Y				8								
460	D	60	8,6	11,53	13,5	3530	23,3	N/A	88,0	0,91	7,20	2,40	3,10

Motor type	5RN132S02
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	132S
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	7,5 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. F
Temperature rise winding	66 K
Temperature rise surface	26 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM2181-FT165
Cooling method	IC411
Motor weight - approx.	59 kg
Gross weight - approx.	61 kg
Motor inertia	0,0140 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	0 dB(A)

Rotor type	Cage motor
Bearing type	6308-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	2,2100 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	200%	789%	177%	321%	4,49 A
@ D 460V 60Hz	240%	720%	210%	310%	3,91 A

NOTE

All performance values at rated voltage and frequency.


All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

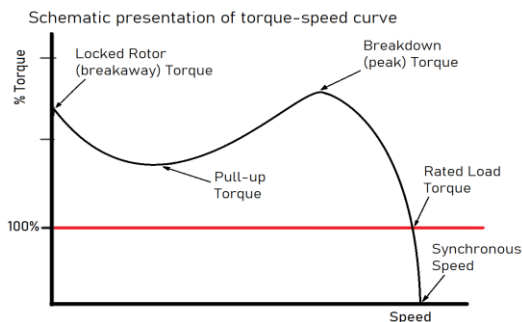

P000000585
P000000594



Driving efficiency and sustainability

