

Model No. 2-Pole cage motor 5RN 200L 30kW D400V 50Hz IM1041

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	30	40	53,5	2960	96,8	IE2	93,6 992,0	0,88 0,86	6,86	2,48	3,04
690	Y				30,9								
460	D	60	33,5	44,91	52	3560	89,9	IE2	93,5 92,4	0,89 0,86	7,13	2,46	3,16

Motor type	5RN200L02E26
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	200L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	30 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	59 K
Temperature rise surface	19 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6312/C3
Lubrication method	20gr/5600hrs
Type of grease	Unirex N3

Phase resistance at 20°C	0,1851 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	248%	672%	210%	304%	15,7 A
@ D 460V 60Hz	246%	694%	210%	316%	14,5 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM1041
Cooling method	IC411
Motor weight - approx.	210 kg
Gross weight - approx.	216 kg
Motor inertia	0,1510 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	71 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

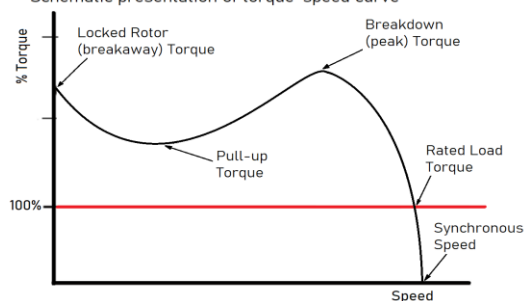

P000012148
P000012046



Driving efficiency and sustainability

