

Model No. 4-Pole cage motor 5RN 200L 37kW D400V 50Hz IM2021-FF350

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	37	49,6	67	1470	240,4	IE2	92,7	0,86	6,80	2,40	3,10
690	Y				38,6								
460	D	60	42,5	56,97	66,5	1770	229,3	IE2	93,6 94,1	0,86 0,84	6,80	2,40	3,10

Motor type	5RN200L04E28
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	200L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	37 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise winding	73 K
Temperature rise surface	33 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6312-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	240%	679%		310%	
@ D 460V 60Hz	240%	679%		310%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30


This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2021-FF350
Cooling method	IC411
Motor weight - approx.	247 kg
Gross weight - approx.	250 kg

Vibration level	according IEC60034-14
-----------------	-----------------------

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

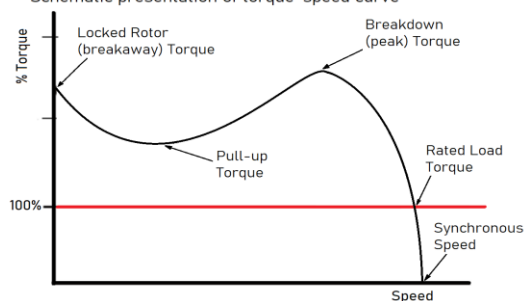

P000012391
P000012392



Driving efficiency and sustainability

