

Model No. 6-Pole cage motor 5RN 200L 22kW D400V 50Hz IM1041

| U<br>(V) | Δ / Y<br>Conn | f<br>[Hz] | P<br>[kW] | P<br>[hp] | I<br>[A] | n<br>[RPM] | T<br>[Nm] | IE<br>Class | % EFF at __ load |       |       | PF at __ load |       |       | I <sub>A</sub> /I <sub>N</sub><br>[pu] | T <sub>A</sub> /T <sub>N</sub><br>[pu] | T <sub>K</sub> /T <sub>N</sub><br>[pu] |
|----------|---------------|-----------|-----------|-----------|----------|------------|-----------|-------------|------------------|-------|-------|---------------|-------|-------|----------------------------------------|----------------------------------------|----------------------------------------|
|          |               |           |           |           |          |            |           |             | FL               | 3/4FL | 1/2FL | FL            | 3/4FL | 1/2FL |                                        |                                        |                                        |
| 400      | D             | 50        | 22        | 30        | 43,4     | 977        | 215,0     | IE2         | 91,3             | 91,5  |       | 0,80          | 0,78  |       | 5,85                                   | 2,29                                   | 2,35                                   |
| 690      | Y             |           |           |           | 25       |            |           |             |                  |       |       |               |       |       |                                        |                                        |                                        |
| 460      | D             | 60        | 26,5      | 35,52     | 44       | 1174       | 215,6     | IE1         | 91,8             | 92,6  |       | 0,81          | 0,78  |       | 5,71                                   | 2,17                                   | 2,21                                   |

|                |                              |
|----------------|------------------------------|
| Motor type     | 5RN200L06E27                 |
| Enclosure      | Totally Enclosed Fan Cooling |
| Frame Material | Cast iron                    |
| Frame size     | 200L                         |
| Duty           | S1                           |
| Voltage        | 400 V                        |
| Frequency      | 50 Hz                        |
| Power output   | 22 kW                        |

|                               |                  |
|-------------------------------|------------------|
| Insulation class              | F                |
| Ambient temperature           | -20 till 40 °C   |
| Temperature rise              | temp.rise acc. B |
| Temperature rise winding      | 52 K             |
| Temperature rise surface      | 35 K             |
| Altitude above sea level      | 1000 mtr         |
| Hazardous area classification | Safe area        |

|              |              |
|--------------|--------------|
| Rotor type   | Cage motor   |
| Bearing type | 6312-2Z/C3WT |

|                |           |
|----------------|-----------|
| Type of grease | Unirex N3 |
|----------------|-----------|

|                          |            |
|--------------------------|------------|
| Phase resistance at 20°C | 0,4263 Ohm |
| Country of origin        | CZ         |

| Voltage/Freq  | Locked rotor<br>Torque [%<br>nom] | Starting<br>current<br>[% nom] | Pull-up<br>Torque<br>[% nom] | Breakdown<br>Torque<br>[% nom] | No-load<br>Current<br>[A] |
|---------------|-----------------------------------|--------------------------------|------------------------------|--------------------------------|---------------------------|
| @ D 400V 50Hz | 229%                              | 582%                           | 208%                         | 235%                           | 16,4 A                    |
| @ D 460V 60Hz | 217%                              | 577%                           | 189%                         | 221%                           | 15,2 A                    |

#### NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


|            |                  |               |
|------------|------------------|---------------|
| Efficiency | Europe           | Global IEC    |
| Standards  | EN-IEC: 60034-30 | IEC: 60034-30 |

This is an uncontrolled copy, data can be changed anytime.

|                        |                         |
|------------------------|-------------------------|
| Degree of protection   | IP55                    |
| Mounting type          | IM1041                  |
| Cooling method         | IC411                   |
| Motor weight - approx. | 215 kg                  |
| Gross weight - approx. | 221 kg                  |
| Motor inertia          | 0,3620 kgm <sup>2</sup> |
| Vibration level        | according IEC60034-14   |

|                       |          |
|-----------------------|----------|
| Direction of rotation | cw / ccw |
|-----------------------|----------|

Schematic presentation of torque-speed curve

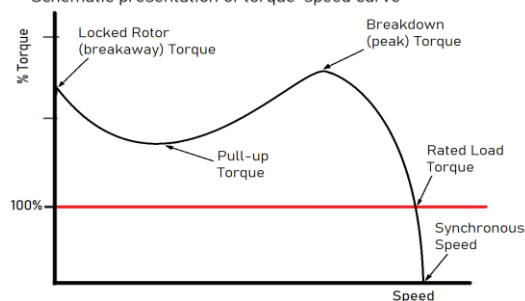

P000012193  
P000012279



Driving efficiency and sustainability

