

Model No. 2-Pole cage motor 5RN 90L 2,2kW D400V 50Hz IM3641-FT130

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	2,2	3	4,6	2870	7,3	IE1	80,8 80,9 78,8	0,85 0,79 0,67	6,98	2,83	3,15
690	Y				2,65								
460	D	60	2,55	3,418	4,55	3465	7,0	N/A	82,2	0,85	7,14	2,79	3,86

Motor type	5RN90L02
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	90L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	2,2 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. F
Temperature rise winding	72 K
Temperature rise surface	22 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6205-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	8,7700 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	283%	697%	252%	315%	2,58 A
@ D 460V 60Hz	279%	712%	261%	386%	2,1 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3641-FT130
Cooling method	IC411
Motor weight - approx.	17 kg
Gross weight - approx.	18 kg
Motor inertia	0,0022 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	0 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

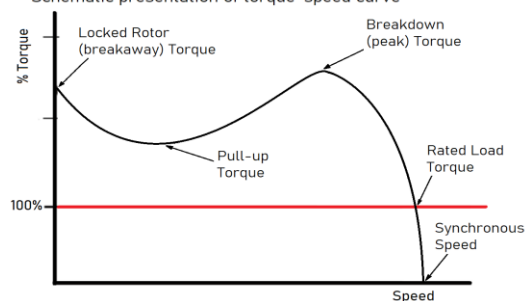

P000000273
P000000286



Driving efficiency and sustainability

