


rotor nl®

[illegible]


Degree of protection	IP55
Mounting type	IM1001
Cooling method	IC411
Motor weight - approx.	50 kg
Gross weight - approx.	52 kg
Motor inertia	0,0127 kgm ²
Vibration level	according IEC60034-14
Direction of rotation	cw /ccw
	PTC 150°C

	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
Voltage/Freq					
@ D 230V 50Hz	264%	659%		310%	4,1 A

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

Driving efficiency and sustainability

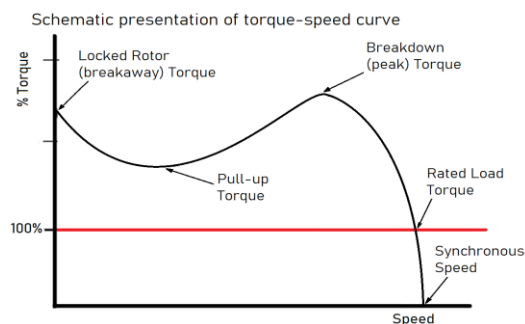

1