

Model No. 4-Pole cage motor 6RD 132M 7,5kW D400V 50Hz IM2001-FF265

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	7,5	10	14,2	1462	49,0	IE3	90,4	0,83	6,85	2,10	2,70
690	Y				8,23								
460	D	60	8,63	11,57	14,4	1754	47,0	IE2	90,4	0,83	6,85	2,10	2,70
795	Y				8,3								

Motor type	6RD132M4E3
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	132M
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	7,5 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-

Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	ExII2G Ex db eb IIC T4 Gb
Te time	0 sec

Rotor type	Cage motor
Bearing type	6308-2Z/C3

Type of grease	Unirex N3
----------------	------------------

Country of origin	IT
-------------------	-----------

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	210%	687%		270%	5,5 A
@ D 460V 60Hz	210%	684%		270%	5,5 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30


This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2001-FF265
Cooling method	IC411
Motor weight - approx.	162 kg
Gross weight - approx.	167 kg
Motor inertia	0,0428 kgm²
Vibration level	according IEC60034-14

Direction of rotation	cw /ccw
-----------------------	----------------

PTC 150°C

Schematic presentation of torque-speed curve

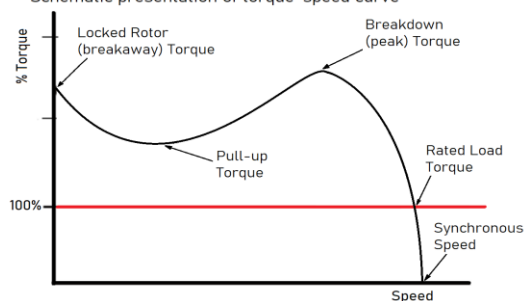

P000057500
P000059208



Driving efficiency and sustainability

