

Model No. 8-Pole cage motor 6RD 180L 11kW D400V 50Hz IM1001

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __ load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
400	D	50	11	15	23,3	731	143,7	IE3	88,6	88,9	88,1	0,77	0,71	0,60	5,70	1,80	2,30
460	D	60	11	15	20,8	880	119,4	IE3	89,5	89,5	87,9	0,74	0,68	0,55	5,86	1,84	

Motor type	6RD180L8E3
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	180L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	11 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-

Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	ExII2G Ex db eb IIC T4 Gb

Rotor type	Cage motor
Bearing type	6310-2Z/C3

Type of grease	Unirex N3
----------------	------------------

Country of origin	IT
-------------------	-----------

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	180%			230%	
@ D 460V 60Hz	184%	581%			

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30


This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM1001
Cooling method	IC411
Motor weight - approx.	350 kg
Gross weight - approx.	360 kg
Motor inertia	0,2874 kgm²
Vibration level	according IEC60034-14

Direction of rotation	cw /ccw
-----------------------	----------------

	PTC 150°C
--	------------------

Schematic presentation of torque-speed curve

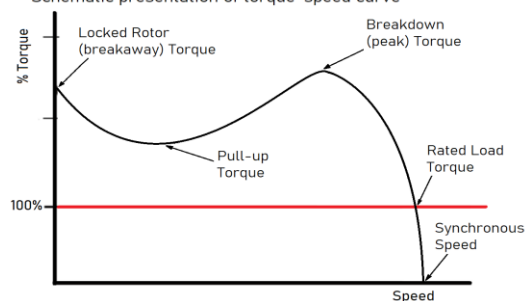

P000060126
P000066405



Driving efficiency and sustainability

