

Model No. 2-Pole cage motor 6RD 315L 200kW D400V 50Hz IM3011-FF600

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	200	268,1	338	2980	640,9	IE3	95,8	0,89	7,12	1,92	3,10
690	Y				195								
460	D	60	230	308,3	338	3576	614,2	IE3	95,8	0,89	7,12	1,92	3,10

Motor type	6RD315LC2E3
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	315L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	200 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-

Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	ExII2G Ex db eb IIC T4 Gb

Rotor type	Cage motor
Bearing type	6316-2Z/C3

Type of grease	Unirex N3
----------------	-----------

Country of origin	IT
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	192%	713%		310%	95,4 A
@ D 460V 60Hz	192%	713%		310%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3011-FF600
Cooling method	IC411
Motor weight - approx.	1810 kg
Gross weight - approx.	1860 kg
Motor inertia	2,4519 kgm ²
Vibration level	according IEC60034-14

Direction of rotation	cw /ccw
-----------------------	---------

Schematic presentation of torque-speed curve

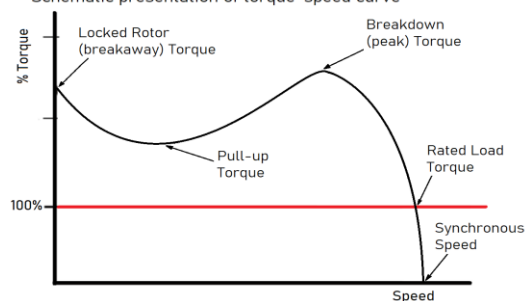

P000057538
P000068121



Driving efficiency and sustainability

