

Model No. 2-Pole cage motor 6RN 100L 3kW D230V 50Hz IM3041-FF215

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __ load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
230	D	50	3	4	10,3	2835	10,1	IE1	83,7	85,4	85,3	0,88	0,83	0,73	6,72	3,27	3,40
400	Y				5,95												
265	D	60	3,45	4,625	10,1	3435	9,6	IE1	84,9	86,1	85,7	0,88	0,84	0,76	7,39	3,84	3,87
460	Y				5,85												

Motor type	6RN100L02E14
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	100L
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	3 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. F
Temperature rise winding	79 K
Temperature rise surface	33 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Degree of protection	IP55
Mounting type	IM3041-FF215
Cooling method	IC411
Motor weight - approx.	34 kg
Gross weight - approx.	35 kg
Motor inertia	0,0034 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	67 dB(A)

Rotor type	Cage motor
Bearing type	6306-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	327%	673%		340%	3,97 A
@ D 265V 60Hz	384%	738%	291%	387%	3,55 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1


Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Schematic presentation of torque-speed curve

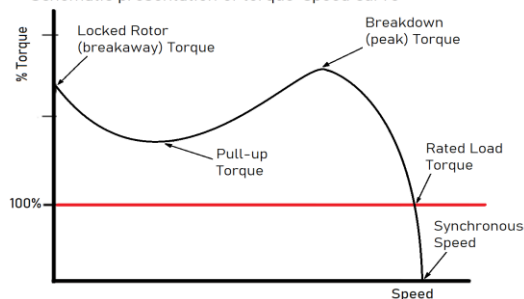

P000046642
P000046643



Driving efficiency and sustainability

