

Model No. 4-Pole cage motor 6RN 100L 4kW D230V 50Hz IM3041-FF215

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
230	D	50	4	5 1/3	15	1430	26,7	IE1	82,4 83,3 82,1	0,81 0,73 0,60	6,30	2,85	3,06
400	Y				8,7								
265	D	60	4,55	6,099	14,4	1735	25,0	IE1	84,6 85,4 84,4	0,82 0,75 0,63	6,92	2,81	3,33
460	Y				8,3								

Motor type	6RN100L04E16
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	100L
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	4 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. H
Temperature rise winding	84 K
Temperature rise surface	50 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6306-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	285%	632%		306%	8,56 A
@ D 265V 60Hz	281%	690%		333%	7,34 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3041-FF215
Cooling method	IC411
Motor weight - approx.	33 kg
Gross weight - approx.	34 kg
Motor inertia	0,0100 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	60 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

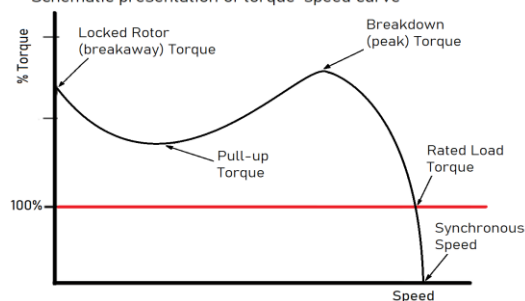

P000046853
P000046854



Driving efficiency and sustainability

