

Model No. 4-Pole cage motor 6RN 100L 2,2kW D230V 50Hz IM2181-FT165

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
230	D	50	2,2	3	7,7	1465	14,3	IE3	86,8 86,7 85,7	0,83	8,17	2,00	3,60
400	Y				4,45								
265	D	60	2,55	3,418	7,38	1765	13,8	IE3	88,1 89,5	0,84 0,80	8,41	2,00	3,65
460	Y				4,26								

Motor type	6RN100L04E34
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	100L
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	2,2 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	40 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6306-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	1,9582 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	200%	818%	160%	360%	3,64 A
@ D 265V 60Hz	200%	860%	144%	365%	3,36 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2181-FT165
Cooling method	IC411
Motor weight - approx.	42 kg
Gross weight - approx.	43 kg
Motor inertia	0,0140 kgm ²
Vibration level	according IEC60034-14

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

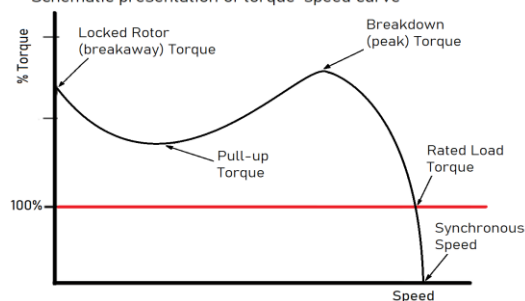

P000017655
P000017656



Driving efficiency and sustainability

