

Model No. 4-Pole cage motor 6RN 100L 4kW D400V 50Hz IM3041-FF215

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	4	5 1/3	8	1455	26,3	IE3	88,6	0,81	7,37	2,26	3,40
690	Y				4,65								
460	D	60	4,55	6,099	7,8	1755	24,8	IE3	90,1	0,81	8,86	3,04	3,85

Motor type	6RN100L04E36V
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	100L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	4 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM3041-FF215
Cooling method	IC411
Motor weight - approx.	51 kg
Gross weight - approx.	53 kg
Vibration level	according IEC60034-14
Direction of rotation	cw /ccw

Rotor type	Cage motor
Bearing type	6306-2Z/C3WT


Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	3,1324 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	226%	736%		340%	
@ D 460V 60Hz	304%	884%		385%	3,58 A

NOTE
All performance values at rated voltage and frequency.
All performance parameters are subjected to standard tolerance as per IEC 60034-1
Voltage, Frequency are as per IEC60034-1
Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

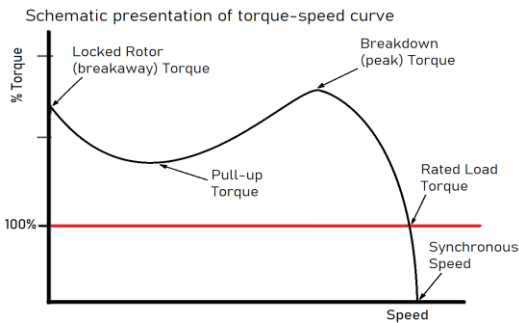

This is an uncontrolled copy, data can be changed anytime.

Driving efficiency and sustainability

