

Model No. 4-Pole cage motor 6RN 100L 2,2kW D400V 50Hz IM2181-FT165

| U<br>(V) | Δ / Y<br>Conn | f<br>[Hz] | P<br>[kW] | P<br>[hp] | I<br>[A] | n<br>[RPM] | T<br>[Nm] | IE<br>Class | % EFF at __ load |       |       | PF at __load |       |       | I <sub>A</sub> /I <sub>N</sub><br>[pu] | T <sub>A</sub> /T <sub>N</sub><br>[pu] | T <sub>K</sub> /T <sub>N</sub><br>[pu] |
|----------|---------------|-----------|-----------|-----------|----------|------------|-----------|-------------|------------------|-------|-------|--------------|-------|-------|----------------------------------------|----------------------------------------|----------------------------------------|
|          |               |           |           |           |          |            |           |             | FL               | 3/4FL | 1/2FL | FL           | 3/4FL | 1/2FL |                                        |                                        |                                        |
| 400      | D             | 50        | 2,2       | 3         | 4,5      | 1465       | 14,3      | IE4         | 89,5             | 89,6  | 88,3  | 0,79         | 0,73  | 0,61  | 9,72                                   | 3,28                                   | 4,66                                   |
| 690      | Y             |           |           |           | 2,6      |            |           |             |                  |       |       |              |       |       |                                        |                                        |                                        |
| 460      | D             | 60        | 2,55      | 3,418     | 3,9      | 1770       | 13,8      | IE4         | 90,3             | 89,9  | 88,1  | 0,77         | 0,70  | 0,58  | 10,10                                  | 3,35                                   | 4,70                                   |

|                               |                              |
|-------------------------------|------------------------------|
| Motor type                    | 6RN100L04E44                 |
| Enclosure                     | Totally Enclosed Fan Cooling |
| Frame Material                | Cast iron                    |
| Frame size                    | 100L                         |
| Duty                          | S1                           |
| Voltage                       | 400 V                        |
| Frequency                     | 50 Hz                        |
| Power output                  | 2,2 kW                       |
| Insulation class              | F                            |
| Ambient temperature           | -20 till 40 °C               |
| Temperature rise              | temp.rise acc. B             |
| Temperature rise winding      | 28 K                         |
| Temperature rise surface      |                              |
| Altitude above sea level      | 1000 mtr                     |
| Hazardous area classification | Safe area                    |

|                                    |                         |
|------------------------------------|-------------------------|
| Degree of protection               | IP55                    |
| Mounting type                      | IM2181-FT165            |
| Cooling method                     | IC411                   |
| Motor weight - approx.             | 39 kg                   |
| Gross weight - approx.             | 40 kg                   |
| Motor inertia                      | 0,0140 kgm <sup>2</sup> |
| Vibration level                    | according IEC60034-14   |
| Noise level (pressure) acc 60034-9 | 63 dB(A)                |

|              |              |
|--------------|--------------|
| Rotor type   | Cage motor   |
| Bearing type | 6306-2Z/C3WT |

|                |           |
|----------------|-----------|
| Type of grease | Unirex N3 |
|----------------|-----------|

|                          |            |
|--------------------------|------------|
| Phase resistance at 20°C | 4,9350 Ohm |
| Country of origin        | CZ         |

| Voltage/Freq  | Locked rotor<br>Torque [%<br>nom] | Starting<br>current<br>[% nom] | Pull-up<br>Torque<br>[% nom] | Breakdown<br>Torque<br>[% nom] | No-load<br>Current<br>[A] |
|---------------|-----------------------------------|--------------------------------|------------------------------|--------------------------------|---------------------------|
| @ D 400V 50Hz | 328%                              | 973%                           | 224%                         | 466%                           | 2,36 A                    |
| @ D 460V 60Hz | 335%                              | 1158%                          | 229%                         | 470%                           | 2,18 A                    |

#### NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1


Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

|            |                  |               |
|------------|------------------|---------------|
| Efficiency | Europe           | Global IEC    |
| Standards  | EN-IEC: 60034-30 | IEC: 60034-30 |

This is an uncontrolled copy, data can be changed anytime.

Schematic presentation of torque-speed curve

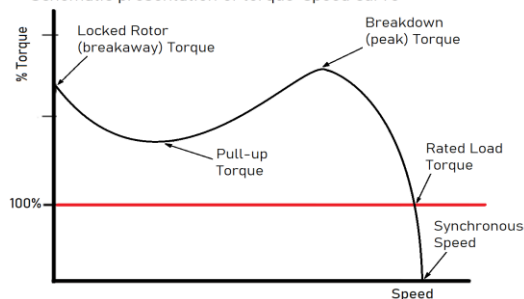

P000040305  
P000040340



Driving efficiency and sustainability

