

Model No. 2-Pole cage motor 6RN 132S 7,5kW D230V 50Hz IM1081

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
230	D	50	7,5	10	24,4	2925	24,5	IE1	88,0	88,7	88,1	0,88	0,83	0,74	6,85	2,11	3,05
400	Y				14,1												
265	D	60	8,6	11,53	23,9	3525	23,3	IE1	89,3	89,9	89,3	0,88	0,84	0,76	7,11	2,06	3,13
460	Y				13,8												

Motor type	6RN132S02E11
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	132S
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	7,5 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. H
Temperature rise winding	84 K
Temperature rise surface	34 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM1081
Cooling method	IC411
Motor weight - approx.	58 kg
Gross weight - approx.	60 kg
Motor inertia	0,0160 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	68 dB(A)

Rotor type	Cage motor
Bearing type	6308-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	211%	684%	191%	305%	9,41 A
@ D 265V 60Hz	206%	711%	188%	313%	8,32 A

NOTE


All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

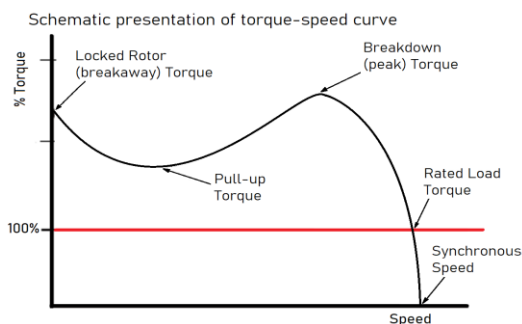

P000041415

P000041416



This is an uncontrolled copy, data can be changed anytime.

Driving efficiency and sustainability

