

Model No. 4-Pole cage motor 6RN 132S 5,5kW D400V 50Hz IM3041-FF265

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	5,5	7 1/3	10,5	1475	35,6	IE3	89,6 89,6 88,6	0,84 0,80 0,71	8,20	2,80	3,90
690	Y				6,1								
460	D	60	6,3	8,445	10,4	1770	34,0	IE3	91,7 92,0 91,3	0,83 0,79 0,69	10,00	3,10	4,20

Motor type	6RN132S04E30
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	132S
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	5,5 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	47 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6308-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	1,5700 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	280%	820%	220%	390%	4,4 A
@ D 460V 60Hz	310%	1000%		420%	4,07 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3041-FF265
Cooling method	IC411
Motor weight - approx.	75 kg
Gross weight - approx.	77 kg
Motor inertia	0,0460 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	57 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

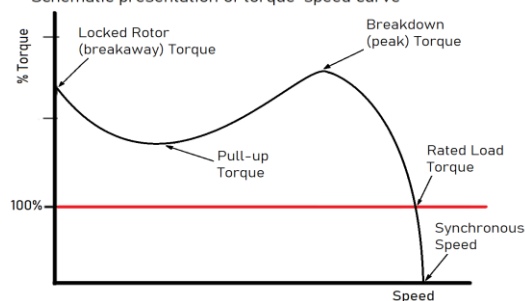

P000013498
P000058310



Driving efficiency and sustainability

