

Model No. 8-Pole cage motor 6RN 132S 2,2kW D230V 50Hz IM2081-FF265

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
230	D	50	2,2	3	10,7	720	29,2	IE1	78,2 78,7 76,3	0,65 0,57 0,45	4,13	1,69	2,31
400	Y				6,2								
265	D	60	2,55	3,418	10,8	870	28,0	IE1	78,6 79,6 77,9	0,64 0,57 0,46	3,76	1,22	1,98
460	Y				6,25								

Motor type	6RN132S08E10
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	132S
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	2,2 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	59 K
Temperature rise surface	29 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6308-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	2,2000 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	169%	411%		231%	7,15 A
@ D 265V 60Hz	122%	376%	110%	198%	6,53 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2081-FF265
Cooling method	IC411
Motor weight - approx.	61 kg
Gross weight - approx.	63 kg
Motor inertia	0,0190 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	63 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

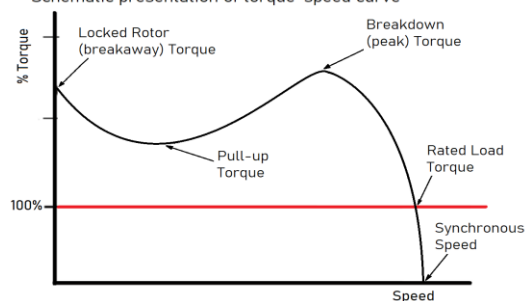

P000040156
P000040157



Driving efficiency and sustainability

