

Datasheet

rotor nl

rotor
WEG Group

Mors 1-5, 7151 MX Eibergen NL
www.rotor.nl tel.: +31 545 464640
sales@rotor.nl tel.: +31 545 464646

Model No. 4-Pole cage motor 6RN 160L 18,5kW D400V 50Hz IM3041-FF300

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	18,5	24,8	34,9	1474	119,9	IE2	91,0	0,85	7,70	2,50	3,30
690	Y				20,1								
460	D	60	21,3	28,55	34,3	1773	114,7	IE2	91,9	0,85	7,70	2,50	3,30

Motor type	6RN160L04E26
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	160L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	18,5 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. H
Temperature rise winding	77 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM3041-FF300
Cooling method	IC411
Motor weight - approx.	122 kg
Gross weight - approx.	126 kg
Motor inertia	0,0990 kgm ²
Vibration level	according IEC60034-14

Rotor type	Cage motor
Bearing type	6309-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	0,2458 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	250%	770%		330%	14,6 A
@ D 460V 60Hz	250%	769%		330%	12,7 A

NOTE

All performance values at rated voltage and frequency.


All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

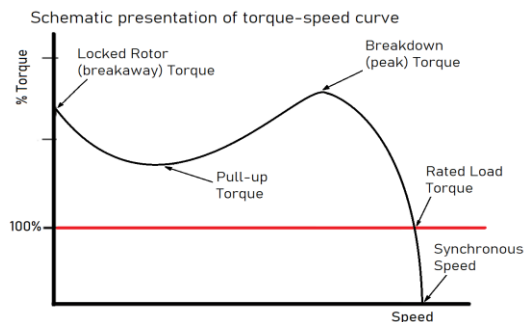

P000012236
P000012367



Driving efficiency and sustainability

