

Model No. 6-Pole cage motor 6RN 180L 15kW D400V 50Hz IM3021-FF300

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
400	D	50	15	20	31	970	147,7	IE2	90,7	91,0	90,4	0,77	0,71	0,59	6,31	2,37	3,13
690	Y				17,9												
460	D	60	18	24,13	31,3	1170	146,9	IE2	91,4	91,9	91,5	0,80	0,74	0,64	6,31	2,26	2,84

Motor type	6RN180L06E24
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	180L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	15 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. F
Temperature rise winding	66 K
Temperature rise surface	40 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM3021-FF300
Cooling method	IC411
Motor weight - approx.	155 kg
Gross weight - approx.	160 kg
Motor inertia	0,1700 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	56 dB(A)

Rotor type	Cage motor
Bearing type	6310-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	0,5760 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	237%	629%	190%	313%	15,4 A
@ D 460V 60Hz	226%	629%	190%	284%	13,8 A

NOTE

All performance values at rated voltage and frequency.


All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

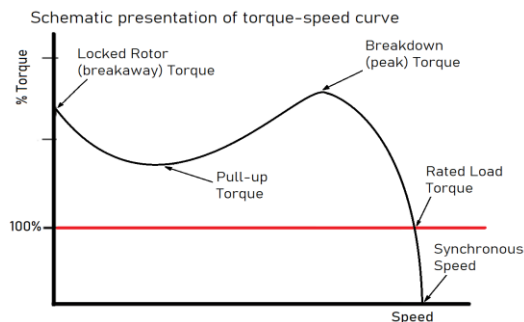

P000014433
P000014436



Driving efficiency and sustainability

