

Model No. 2-Pole cage motor 6RN 200L 45kW D400V 50Hz IM2021-FF350

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	45	60,32	79,3	2950	145,7	IE2	92,9	0,87	7,07	2,44	3,25
690	Y				45,8								
460	D	60	51	68,36	78	3555	137,0	N/A	93,0	0,88	7,40	2,60	3,20

Motor type	6RN200L02E26
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	200L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	45 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise winding	69 K
Temperature rise surface	24 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM2021-FF350
Cooling method	IC411
Motor weight - approx.	250 kg
Gross weight - approx.	260 kg
Motor inertia	0,1760 kgm ²
Vibration level	according IEC60034-14

Rotor type	Cage motor
Bearing type	6312-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	244%	706%		325%	25 A
@ D 460V 60Hz	260%	739%		320%	25 A

NOTE

All performance values at rated voltage and frequency.


All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

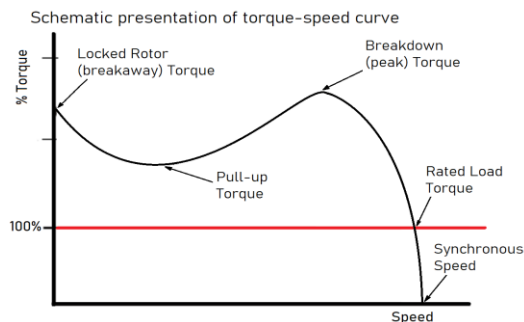

P000015319
P000049211



Driving efficiency and sustainability

