

Model No. 6-Pole cage motor 6RN 200L 22kW D400V 50Hz IM1041

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	22	30	43,5	980	214,4	IE4	93,7	0,78	7,10	2,90	3,00
690	Y				25,1								
460	D	60	22	30	38,3	1185	177,3	IE4	94,8	0,76	8,27	3,19	3,36

Motor type	6RN200L06E45
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	200L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	22 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	50 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM1041
Cooling method	IC411
Motor weight - approx.	270 kg
Gross weight - approx.	280 kg

Vibration level according IEC60034-14

Direction of rotation cw / ccw

Rotor type	Cage motor
Bearing type	6312-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	0,2545 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	290%	708%		300%	19,5 A
@ D 460V 60Hz	319%	827%		336%	18,5 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1


Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Schematic presentation of torque-speed curve

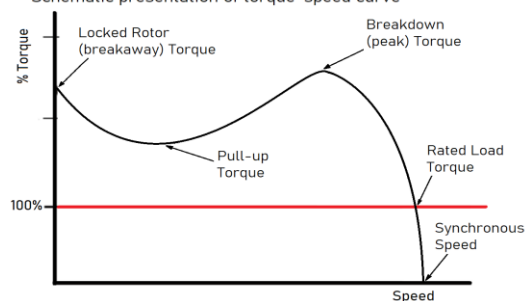

P000057685
P000059703



Driving efficiency and sustainability

