

Model No. 8-Pole cage motor 6RN 200L 15kW D400V 50Hz IM2021-FF350

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __ load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
400	D	50	15	20	33,5	730	196,2	IE3	89,6	90,1	89,4	0,73	0,65	0,53	6,80	3,00	3,70
690	Y				19,2												
460	D	60	18	24,13	33,5	875	196,5	IE3	90,2	90,7	90,2	0,74	0,67	0,55	6,80	2,80	3,50

Motor type	6RN200L08E35
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	200L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	15 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6312-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	300%	677%		370%	
@ D 460V 60Hz	280%	677%		350%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2021-FF350
Cooling method	IC411
Motor weight - approx.	260 kg
Gross weight - approx.	270 kg
Motor inertia	0,4200 kgm ²
Vibration level	according IEC60034-14

Direction of rotation	cw /ccw
-----------------------	---------

Schematic presentation of torque-speed curve

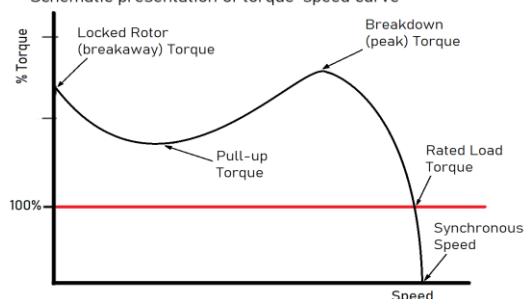

P000048660
P000048661



Driving efficiency and sustainability

