


rotor nl®

[illegible]

Country of origin	CZ
-------------------	----

	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
Voltage/Freq					
@ D 440V 60Hz	221%	653%	170%	248%	18,2 A


Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3021-FF400
Cooling method	IC411
Motor weight - approx.	340 kg
Gross weight - approx.	350 kg
Motor inertia	0,6700 kgm²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	59 dB(A)

Direction of rotation	cw /ccw
-----------------------	---------

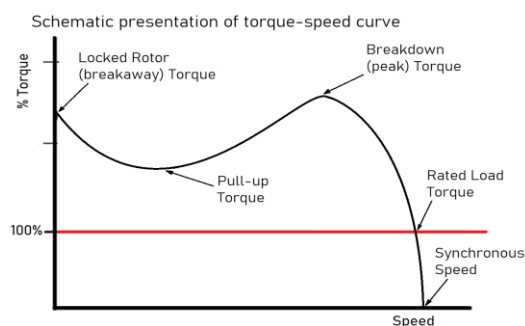

P000016935

