

Model No. 6-Pole cage motor 6RN 225M 44,5kW D440V 60Hz IM2021-FF400

[illegible]

Motor type	6RN225M06E36	Degree of protection	IP55
Enclosure	Totally Enclosed Fan Cooling	Mounting type	IM2021-FF400
Frame Material	Cast iron	Cooling method	IC411
Frame size	225M	Motor weight - approx.	390 kg
Duty	S1	Gross weight - approx.	400 kg
Voltage	440 V	Motor inertia	0,8400 kgm²
Frequency	60 Hz		
Power output	44,5 kW	Vibration level	according IEC60034-14
		Noise level (pressure) acc 60034-9	0 dB(A)
Insulation class	F		
Ambient temperature	-20 till 40 °C		
Temperature rise	temp.rise acc. H		
Temperature rise winding	82 K		
Temperature rise surface			
Altitude above sea level	1000 mtr	Direction of rotation	cw /ccw
Hazardous area classification	Safe area		
Te time	0 sec		
Rotor type	Cage motor		
Bearing type	6313/C3		
Lubrication method	22gr/12000hrs		
Type of grease	Unirex N3		

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 440V 60Hz	203%	696%	222%	235%	19,4 A

NOTE

All performance values at rated voltage and frequency.


All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

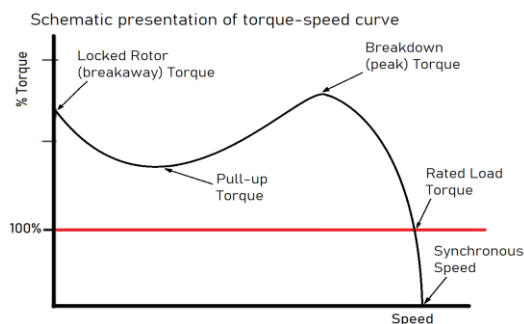

P000059027

