

Model No. 4-Pole cage motor 6RN 225S 37kW D400V 50Hz IM2021-FF400

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	37	49,6	67,3	1478	239,1	IE3	93,8 94,4 94,3	0,85 0,81 0,72	6,55	2,43	2,64
690	Y				38								
460	D	60	42,5	56,97	66,4	1778	228,3	IE2	94,4	0,85	7,00	2,24	2,56

Motor type	6RN225S04E30
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	225S
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	37 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	58 K
Temperature rise surface	33 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6313/C3
Lubrication method	22gr/10200hrs
Type of grease	Unirex N3

Phase resistance at 20°C	0,1711 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	243%	655%	224%	264%	23,5 A
@ D 460V 60Hz	224%	698%	215%	256%	21,8 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2021-FF400
Cooling method	IC411
Motor weight - approx.	310 kg
Gross weight - approx.	320 kg
Motor inertia	0,4200 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	57 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

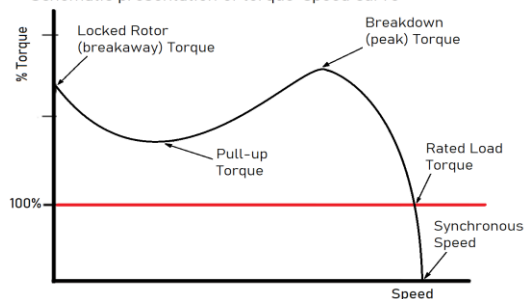

P000013728
P000046724



Driving efficiency and sustainability

