

Model No. 4-Pole cage motor 6RN 225S 43kW D440V 60Hz IM2081-FF400

U (V)	Δ/Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
440	D	60	43	57,64	69,4	1776	231,2	IE2	94,1	0,86	6,15	2,10	2,34

Motor type	6RN225S04E30
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	225S
Duty	S1
Voltage	440 V
Frequency	60 Hz
Power output	43 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. F
Temperature rise winding	61 K
Temperature rise surface	35 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6313/C3
Lubrication method	22gr/8900hrs
Type of grease	Unirex N3

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 440V 60Hz	210%	615%	195%	234%	20,1 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2081-FF400
Cooling method	IC411
Motor weight - approx.	320 kg
Gross weight - approx.	330 kg
Motor inertia	0,4200 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	60 dB(A)

Direction of rotation	cw /ccw
-----------------------	---------

Schematic presentation of torque-speed curve

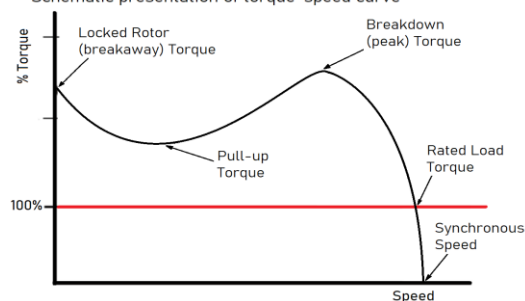

P000018861



Driving efficiency and sustainability

