

Model No. 4-Pole cage motor 6RN 280S 75kW D230V 50Hz IM2021-FF500

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
230	D	50	75	100	232	1485	482,3	IE3	94,9	95,2	94,9	0,86	0,83	0,74	7,18	2,32	2,92
400	Y				134												
265	D	60	75	100	202	1788	400,6	IE3	95,4	95,3	94,4	0,85	0,82	0,72	8,12	2,69	3,21
460	Y				116												

Motor type	6RN280S04E30
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	280S
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	75 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	59 K
Temperature rise surface	29 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6317/C3
Lubrication method	30gr/8000hrs
Type of grease	Unirex N3

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	232%	711%	200%	292%	74,3 A
@ D 265V 60Hz	269%	806%	220%	321%	69,6 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2021-FF500
Cooling method	IC411
Motor weight - approx.	570 kg
Gross weight - approx.	590 kg
Motor inertia	1,4000 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	65 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

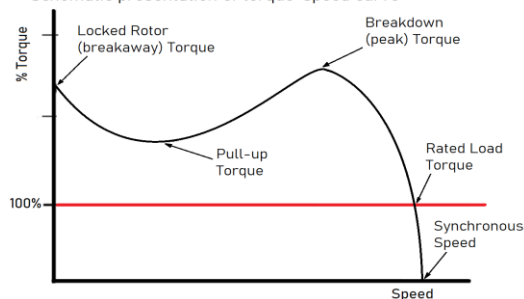

P000051556
P000051557



Driving efficiency and sustainability

