

Model No. 2-Pole cage motor 6RN 80M 1,1kW D230V 50Hz IM3641-FT100

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
230	D	50	1,1	1 1/2	4,21	2840	3,7	IE1	75,7 76,3 73,6	0,86 0,78 0,65	5,79	2,50	2,45
400	Y				2,43								
265	D	60	1,27	1,702	4,09	3435	3,5	IE1	76,8 77,4 75,0	0,87 0,80 0,68	6,59	2,65	2,61
460	Y				2,36								

Motor type	6RN80M02E13
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Aluminum
Frame size	80M
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	1,1 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. H
Temperature rise winding	85 K
Temperature rise surface	32 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6004-2Z/C3WT

Type of grease	Unirex N3
----------------	------------------

Phase resistance at 20°C	2,0878 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	250%	579%		245%	2,48 A
@ D 265V 60Hz	265%	660%		261%	2,15 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3641-FT100
Cooling method	IC411
Motor weight - approx.	13 kg
Gross weight - approx.	13 kg
Motor inertia	0,0010 kgm²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	63 dB(A)

Direction of rotation	cw / ccw
-----------------------	-----------------

Schematic presentation of torque-speed curve

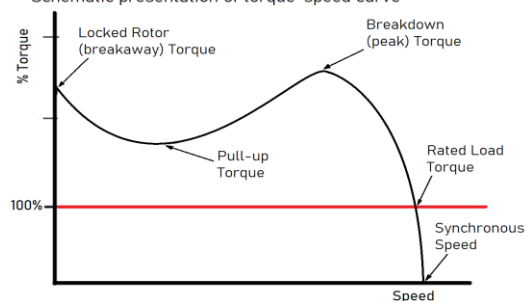

P000040859
P000040860



Driving efficiency and sustainability

