

Model No. 2-Pole cage motor 6RN 90L 2,2kW D230V 50Hz IM1081

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
230	D	50	2,2	3	7,88	2855	7,4	IE1	80,6 81,8 80,8	0,85 0,78 0,66	6,52	2,76	3,20
400	Y				4,55								
265	D	60	2,55	3,418	7,78	3450	7,1	IE1	82,3 83,2 82,0	0,86 0,80 0,69	7,03	2,74	3,31
460	Y				4,49								

Motor type	6RN90L02E14
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Aluminum
Frame size	90L
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	2,2 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. H
Temperature rise winding	82 K
Temperature rise surface	36 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6004-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	0,9536 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	276%	652%		320%	3,97 A
@ D 265V 60Hz	274%	703%		331%	3,39 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM1081
Cooling method	IC411
Motor weight - approx.	15 kg
Gross weight - approx.	15 kg
Motor inertia	0,0018 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	67 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

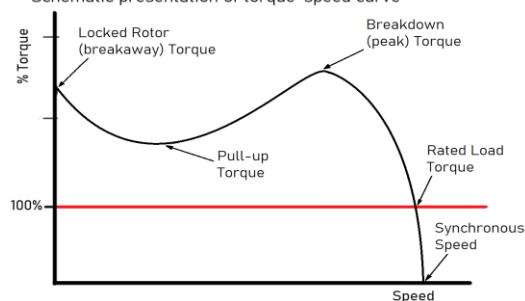

P000040869
P000040870



Driving efficiency and sustainability

