

Model No. 2-Pole cage motor 6RN 90L 2,2kW D400V 50Hz IM2181-FT115

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	2,2	3	4,2	2920	7,2	IE3	85,9	0,88 0,85 0,78	8,20	2,60	4,00
690	Y				2,4								
460	D	60	2,55	3,418	4,5	3515	6,9	IE3	83,0 86,5 85,5	0,86	8,20	4,40	2,70

Motor type	6RN90L02E34
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Aluminum
Frame size	90L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	2,2 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	38 K
Temperature rise surface	20 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6004-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	260%	857%		400%	1,8 A
@ D 460V 60Hz	440%	764%	270%	270%	1,96 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2181-FT115
Cooling method	IC411
Motor weight - approx.	23 kg
Gross weight - approx.	24 kg
Motor inertia	0,0021 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	65 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

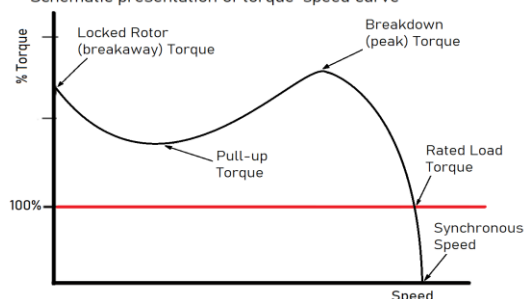

P000017499
P000042505



Driving efficiency and sustainability

