

Model No. 2-Pole cage motor 6RN 90S 1,5kW D230V 50Hz IM2181-FT130

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
230	D	50	1,5	2	5,2	2910	4,9	IE3	85,2 85,6 84,3	0,86 0,80 0,69	8,10	2,70	4,20
400	Y				3								
265	D	60	1,75	2 1/3	5,15	3510	4,8	IE3	86,0 86,0 84,4	0,87 0,82 0,73	8,75	2,64	4,20
460	Y				2,95								

Motor type	6RN90S02E30
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Aluminum
Frame size	90S
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	1,5 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	38 K
Temperature rise surface	10 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6004-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	4,0313 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	270%	809%	220%	420%	2,44 A
@ D 265V 60Hz	264%	871%	211%	420%	2,19 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2181-FT130
Cooling method	IC411
Motor weight - approx.	18 kg
Gross weight - approx.	19 kg
Motor inertia	0,0021 kgm ²
Vibration level	according IEC60034-14

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

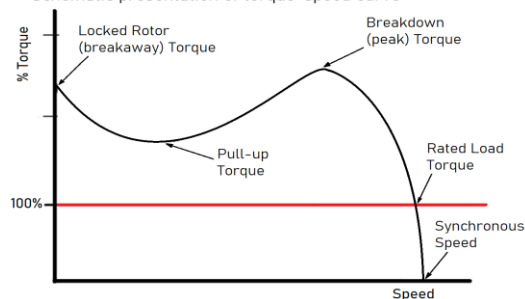

P000017757
P000017758



Driving efficiency and sustainability

