

Model No. 6-Pole cage motor 6RN 90S 0,75kW D230V 50Hz IM1081

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
230	D	50	0,75	1	3,39	945	7,6	IE3	78,5 79,6 78,4	0,70 0,62 0,50	4,54	2,12	2,57
400	Y				1,96								
265	D	60	0,86	1,153	3,24	1145	7,2	IE3	81,3 82,1 80,6	0,69 0,61 0,49	4,90	2,04	2,67
460	Y				1,88								

Motor type	6RN90S06E30
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Aluminum
Frame size	90S
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	0,75 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	45 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6004-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	8,7229 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	212%	454%	211%	257%	2,18 A
@ D 265V 60Hz	204%	490%	204%	267%	2,03 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM1081
Cooling method	IC411
Motor weight - approx.	18 kg
Gross weight - approx.	19 kg
Motor inertia	0,0040 kgm ²
Vibration level	according IEC60034-14

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

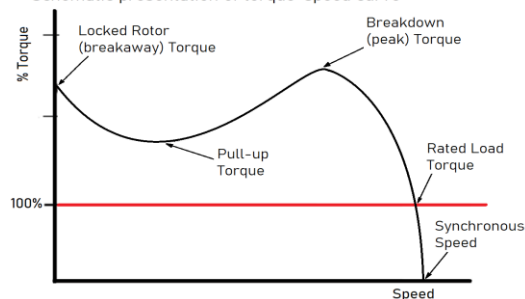

P000018170
P000018171



Driving efficiency and sustainability

