

Model No. 2-Pole cage motor 7RN 315L 255kW D440V 60Hz IM3021-FF740

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
440	D	60	255	341,8	397	3586	679,1	IE3	95,8 95,5 94,7	0,88 0,85 0,78	9,60	4,06	4,51

Motor type	7RN315L02E36
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	315L
Duty	S1
Voltage	440 V
Frequency	60 Hz
Power output	255 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6316/C4
Lubrication method	30gr/3000hrs
Type of grease	Unirex N3

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 440V 60Hz	406%	959%		451%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1


Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3021-FF740
Cooling method	IC411
Motor weight - approx.	1340 kg
Gross weight - approx.	1380 kg
Motor inertia	2,7000 kgm ²
Vibration level	according IEC60034-14
Direction of rotation	cw /ccw
	PTC 150°C

Schematic presentation of torque-speed curve

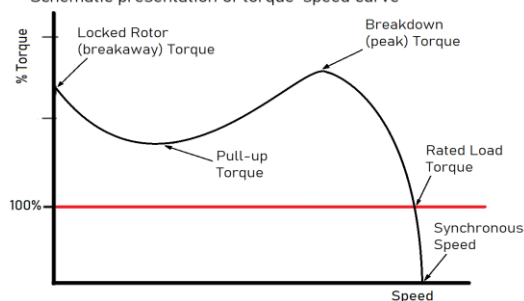

P000060331



Driving efficiency and sustainability

