

Model No. 8-Pole cage motor 7RN 315L 160kW D400V 50Hz IM1001

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	160	214,5	305	741	2062,1	IE4	95,1	0,79	6,30	2,50	2,50
460	D	60	160	214,5	265	893	1711,1	N/A	95,4	0,79	7,20	2,90	2,80

Motor type	7RN315L08E47
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	315L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	160 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-

Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6319/C4
Lubrication method	40gr/6000hrs
Type of grease	Unirex N3

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	250%	629%		250%	
@ D 460V 60Hz	290%	716%		280%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.


Degree of protection	IP55
Mounting type	IM1001
Cooling method	IC411
Motor weight - approx.	1770 kg
Gross weight - approx.	1820 kg
Motor inertia	6,7800 kgm ²

Vibration level	according IEC60034-14
-----------------	-----------------------

Direction of rotation	cw /ccw
-----------------------	---------

	PTC 150°C
--	-----------

Schematic presentation of torque-speed curve

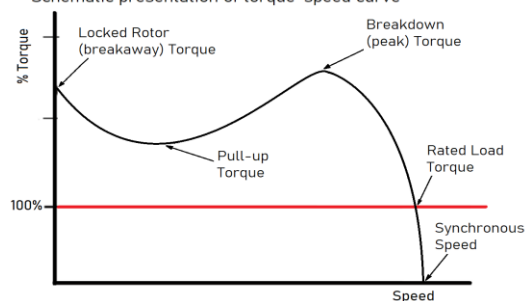

P000049278

P000049279



Driving efficiency and sustainability

