


rotor nl®



www.rotor.nl tel.: +31 545 464640

sales@rotor.nl tel.: +31 545 464646

Model No. 4-Pole cage motor 7RN 355L 530kW D440V 60Hz IM2021-FF840

[illegible]

Motor type	7RN355L04E35	Degree of protection	IP55
Enclosure	Totally Enclosed Fan Cooling	Mounting type	IM2021-FF840
Frame Material	Cast iron	Cooling method	IC411
Frame size	355L	Motor weight - approx.	2290 kg
Duty	S1	Gross weight - approx.	2360 kg
Voltage	440 V	Motor inertia	8,3600 kgm²
Frequency	60 Hz		
Power output	530 kW	Vibration level	according IEC60034-14
		Noise level (pressure) acc 60034-9	83,1 dB(A)
Insulation class	F		
Ambient temperature	-20 till 40 °C		
Temperature rise	temp.rise acc. H		
Temperature rise winding	80 K		
Temperature rise surface		Direction of rotation	cw /ccw
Altitude above sea level	1000 mtr		
Hazardous area classification	Safe area		PTC 150°C
Rotor type	Cage motor		
Bearing type	6320/C4		
Lubrication method	60gr/6000hrs		
Type of grease	Unirex N3		

Country of origin	CZ
-------------------	----

	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
Voltage/Freq					
@ D 440V 60Hz	329%	868%		348%	

NOTE

All performance values at rated voltage and frequency.


All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

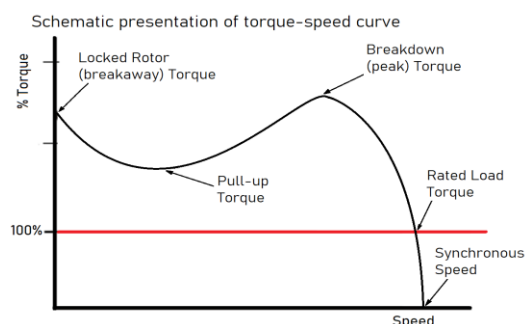

P000047989

