

Model No. 6-Pole cage motor 7RN 355M 355kW D400V 50Hz IM3021-FF840

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	355	475	637	993	3414,1	IE3	96,6 96,7 96,4	0,83 0,85 0,85	7,89	2,49	3,13
690	Y				370								
460	D	60	355	475	570	1194	2839,4	< IE1	95,8	0,82	9,40	####	3,70

Motor type	7RN355M06E33
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	355M
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	355 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise winding	63 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6320/C4
Lubrication method	60gr/6000hrs
Type of grease	Unirex N3

Phase resistance at 20°C	0,0064 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	249%	788%		313%	250 A
@ D 460V 60Hz	3320%	938%		370%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3021-FF840
Cooling method	IC411
Motor weight - approx.	2290 kg
Gross weight - approx.	2360 kg
Motor inertia	12,6000 kgm ²
Vibration level	according IEC60034-14

Direction of rotation	cw / ccw
	PTC 150°C

Schematic presentation of torque-speed curve

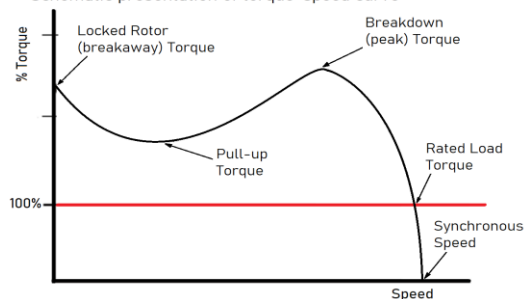

P000043667
P000049261



Driving efficiency and sustainability

