

Model No. 4-Pole cage motor QCA 160L 15kW D400V 50Hz IM2001-FF300

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __ load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
400	D	50	15	20	29,6	1479	96,9	IE4	93,9	93,9	92,8	0,78	0,70	0,58	8,10	3,30	4,30
690	Y				17,1												
460	D	60	17,3	23,19	29,6	1775	93,1	IE3	94,2	93,0	92,8	0,78			8,10	3,30	4,20

Motor type	QCA160LA4E4
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	160L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	15 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-

Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6209-2Z/C3WT

Type of grease	Chevron SRI-2
----------------	----------------------

Country of origin	CN
-------------------	-----------

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	330%	810%		430%	
@ D 460V 60Hz	330%	810%		420%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.


Degree of protection	IP55
Mounting type	IM2001-FF300
Cooling method	IC411
Motor weight - approx.	192 kg
Gross weight - approx.	198 kg
Motor inertia	0,1792 kgm²

Vibration level	according IEC60034-14
-----------------	------------------------------

Direction of rotation	cw /ccw
-----------------------	----------------

	PTC 150°C
--	------------------

Schematic presentation of torque-speed curve

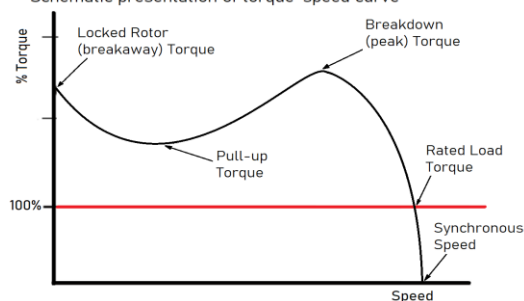

P000049443

P000054492



Driving efficiency and sustainability

