

Model No. 6-Pole cage motor QCA 280M 55kW D400V 50Hz IM2001-FF500

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __ load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
400	D	50	55	75	101	991	530,0	IE4	95,1	95,1	93,8	0,82	0,77	0,66	7,20	2,30	3,00
690	Y				58,7												
460	D	60	63	84,45	101	991	607,1	IE4	94,5	94,5	94,0	0,83	0,80	0,71	7,40	2,30	2,90

Motor type	QCA280MA6E4
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	280M
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	55 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-

Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6317/C3
Lubrication method	30gr/8000hrs
Type of grease	Chevron SRI-2

Phase resistance at 20°C	0,0710 Ohm
Country of origin	CN

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	230%	725%		300%	44 A
@ D 460V 60Hz	230%	738%		290%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.


Degree of protection	IP55
Mounting type	IM2001-FF500
Cooling method	IC411
Motor weight - approx.	740 kg
Gross weight - approx.	760 kg
Motor inertia	3,2641 kgm²

Vibration level	according IEC60034-14
-----------------	------------------------------

Direction of rotation	cw /ccw
-----------------------	----------------

	PTC 150°C
--	------------------

Schematic presentation of torque-speed curve

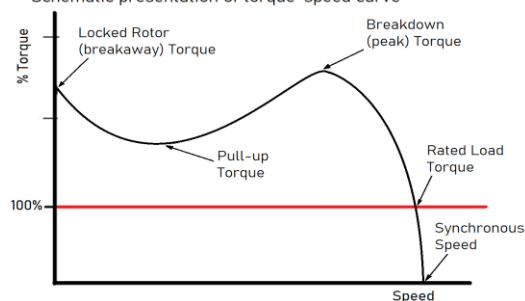

P000049468
P000054590



Driving efficiency and sustainability

