

Model No. 6-Pole cage motor QCA 315L 110kW D400V 50Hz IM3011-FF600

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __ load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
400	D	50	110	150	204	992	1059,0	IE4	95,8	95,8	95,0	0,81	0,77	0,66	6,20	2,20	2,60
690	Y				118												
460	D	60	127	170,2	203	1192	1017,5	N/A	95,0	95,0	94,7	0,83			6,40	2,20	2,50

Motor type	QCA315LA6E4
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	315L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	110 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6319/C3
Lubrication method	40gr/6000hrs
Type of grease	Chevron SRI-2

Country of origin	CN
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	220%	617%		260%	
@ D 460V 60Hz	220%	635%		250%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1


Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3011-FF600
Cooling method	IC411
Motor weight - approx.	1100 kg
Gross weight - approx.	1130 kg
Motor inertia	5,6743 kgm ²
Vibration level	according IEC60034-14
Direction of rotation	cw /ccw
	PTC 150°C

Schematic presentation of torque-speed curve

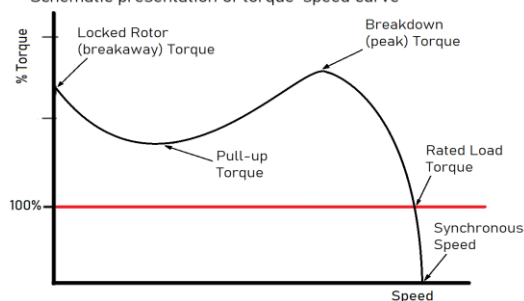

P000049471
P000054611



Driving efficiency and sustainability

