

Model No. 2-Pole cage motor QCA 90L 2,2kW D230V 50Hz IM1001

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __ load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
230	D	50	2,2	3	7,4	2902	7,2	IE4	88,0	88,0	86,3	0,85	0,79	0,65	9,10	4,60	4,40
400	Y				4,3												
265	D	60	2,53	3,391	7,3	3503	6,9	IE4	88,5	88,5	88,8	0,85	0,80	0,69	11,00	5,50	5,70

Motor type	QCA90L2E4
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	90L
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	2,2 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM1001
Cooling method	IC411
Motor weight - approx.	29 kg
Gross weight - approx.	30 kg

Vibration level	according IEC60034-14
-----------------	------------------------------

Direction of rotation	cw /ccw
	PTC 150°C

Rotor type	Cage motor
Bearing type	6205-2Z/C3WT
Type of grease	Chevron SRI-2

Country of origin	CN
-------------------	-----------

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	460%	905%		440%	
@ D 265V 60Hz	550%	1095%		570%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1


Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Schematic presentation of torque-speed curve

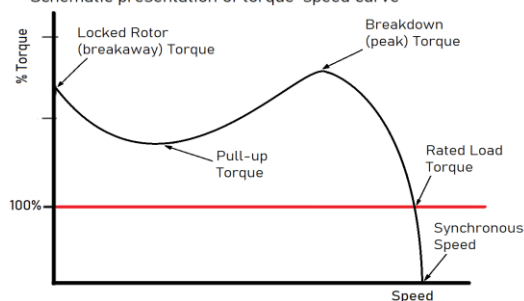

P000057100
P000057101



Driving efficiency and sustainability

