

Model No. 4-Pole cage motor TCA 112M 4kW D400V 50Hz IM2001-FF215

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	4	5 1/3	8,02	1451	26,3	IE3	88,7	0,82	8,00	2,70	3,10
690	Y				4,63								
460	D	60	4,6	6,166	8	1751	25,1	IE1	87,0 87,0 87,0	0,83	8,90	3,16	3,73
					4,59								

Motor type	TCA112MB4E3
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	112M
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	4 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise winding	80 K
Temperature rise surface	-
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6206-2Z/C3WT

Type of grease	Chevron SRI-2
----------------	----------------------

Phase resistance at 20°C	3,2507 Ohm
Country of origin	CN

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	270%	799%		310%	
@ D 460V 60Hz	316%	890%		373%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30


This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2001-FF215
Cooling method	IC411
Motor weight - approx.	48 kg
Gross weight - approx.	49 kg
Motor inertia	0,0192 kgm²
Vibration level	according IEC60034-14

Direction of rotation	cw /ccw
-----------------------	----------------

PTC 150°C

Schematic presentation of torque-speed curve

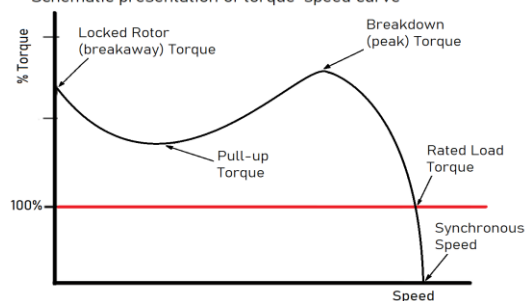

P000019579
P000019580



Driving efficiency and sustainability

