

Model No. 2-Pole cage motor TCA 160L 18.5kW D400V 50Hz IM1001

U (V)	Δ/Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __load FL 3/4FL 1/2FL			PF at __load FL 3/4FL 1/2FL			I _N /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	18,5	24,8	32,1	2953	59,8	IE3	92,4	92,4	92,5	0,90	0,87	0,80	7,38	2,60	3,60
690	Y				18,6												
460	D	60	21,3	28,55	32	3551	57,3	IE3	91,7	91,7	92,2	0,91	0,90	0,83	8,20	2,66	3,61

Motor type	TCA160LA2E3	Degree of protection	IP55
Enclosure	Totally Enclosed Fan Cooling	Mounting type	IM1001
Frame Material	Cast iron	Cooling method	IC411
Frame size	160L	Motor weight - approx.	172 kg
Duty	S1	Gross weight - approx.	177 kg
Voltage	400 V	Motor inertia	0,0900 kgm²
Frequency	50 Hz		
Power output	18,5 kW	Vibration level	according IEC60034-14
Insulation class	F		
Ambient temperature	-20 till 40 °C		
Temperature rise	-		
Temperature rise winding	70 K		
Temperature rise surface		Direction of rotation	cw /ccw
Altitude above sea level	1000 mtr		
Hazardous area classification	Safe area		PTC 150°C
Rotor type	Cage motor		
Bearing type	6209-2Z/C3WT		
Type of grease	Chevron SRI-2		

	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	260%	735%		360%	9,49 A
@ D 460V 60Hz	266%	815%		361%	

NOTE

All performance values at rated voltage and frequency.


All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

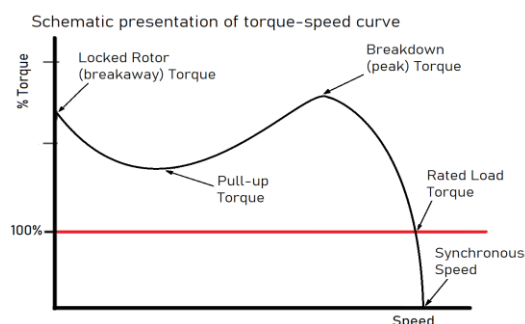

P000019601

P000019602

